


## Log Lighter Bar Installation Instructions For Natural Gas Only


BRAND BY  
**Sioux Chief**

1. Turn off the gas line to the firebox or, if necessary, the main gas line.
2. Center the log lighter bar in the firebox, directly under flue or chimney. Remove stub out cap or old log lighter bar, if necessary.
3. Connect log lighter bar to gas supply using ½" nom. black gas pipe (as shown).
4. Seal unused ½" FIP gas inlets with threaded plugs provided.


### Right Side

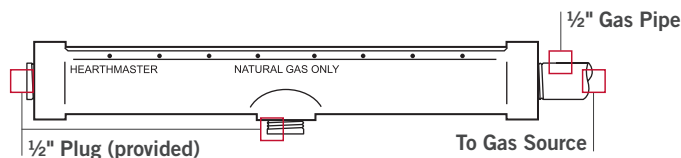

### Left Side

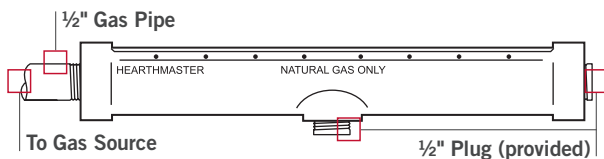

### Bottom

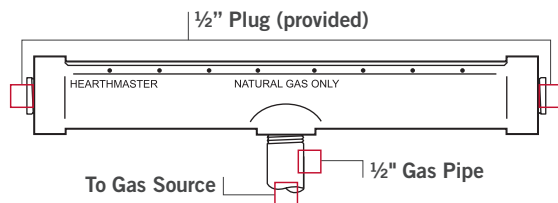

## Log Lighter Ignition

1. Make sure log lighter valve is completely turned off. Make sure chimney damper or flue is open.
2. Arrange wood loosely on log grate above log lighter bar.
3. Crumple paper and place under log lighter bar. Light paper.
4. Turn log lighter valve on until bar ignites.
5. Adjust log lighter valve until desired flame setting is reached.
6. Turn log lighter valve off after logs have started to burn.



**WARNING**  
HearthMaster Log Lighter Bars are  
for use with **NATURAL GAS ONLY**

